

MPR-2 Series

New Generation Network Analyzers



MPR-2 Series

MPR-2 Series DIN rail type Network analyzers are designed to measure and analyze various electrical parameters. With their communication features all measurements can be tracked from a single monitoring center.

MPR-2 series can detect the status and allow the control of devices (breakers, switches, contactors etc.) in the field via their digital inputs and outputs.

PRODUCT SELECTION TABLE	3xV, 3xI, Frequency, W, VA, VA _r , P, Q, S, kWh, kVAh, Demand, Max., Min. Cos φ, I _{neutral}	THD I%	THD V%	Harmonics 1-51.	RS-485	Digital Input	Digital Output	Analog Output (mA/V)	Temperature Input	Relay Output	Hour (RTC)	Current - Voltage Unbalances	Operating Hours Measuring	Alarm	Memory	Log Records	Event Logs	Tariff
MPR-24	●										●							●
MPR-25S-22	●	●	●			2	2				●							●
MPR-26S-23	●	●	●	51	●	2	2			1		●	●	●	4 MB	●	●	●
MPR-27S-23	●	●	●	51	●	2	2	1			●	●	●	●	4 MB	●	●	●
MPR-28S-32	●	●	●	51	●	2	2	1		●	●	●	●	●	4MB	●	●	●

0,5 Class 0,5

Temperature Input


Memory

Real Time Clock

Harmonic Measurement

- DIN Rail Mounting
- Current/Voltage Unbalance
- Harmonic measurement up to 51th harmonic
- Class: 0,5
- Detects wiring errors
- Alarm Management

Application Areas

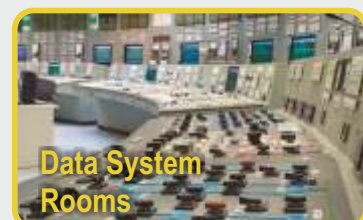

SPECIFICATIONS

	MPR-24	MPR-25S-22	MPR-26S-23	MPR-27S-23	MPR-28S-32
ENCLOSURE					
Dimensions	DIN4 Rail Mounting				
Protection Class	Terminals = IP20, Enclosure Protection Class = IP40				
Display	LCD				
MEASUREMENTS					
VOLTAGE					
Measurement Range	10-400 VAC (L-N) 10 - 690 VAC (L-L)				
Measurement Range with Transformer	1-400.0kV Transformer Ratio: 1-5000				
Accuracy	%0.5 ± 2 Digit				
Input Impedance	>1M Ω				
Burden (Input Load)	<0,5 VA				
CURRENT					
Nominal Current	In : 5A / 1A				
Minimum Current	5 mA				
Measurement Range	50 mA - 5,5 A Accuracy : : %0,5 ± 1 Digit				
Measurement Range with Transformer	50 mA - 10000 A				
Burden	<1 VA				
Overload Current	1,2 In continuous				
Short Time Overload (1s)	10xIn				
POWER/ENERGY					
Active Power	0 - 1 GW Accuracy : %1 ± 1 Digit				
Reactive Power	0 - 1 GVar Accuracy : %1 ± 1 Digit				
Apparent Power	0 - 1 GVA Accuracy : %1 ± 1 Digit				
Power Factor	±1.00 Accuracy : ± 0,02				
Active Energy	0 - 99 999 999 kWh or MWh Accuracy : %1 class 1				
Reactive Energy	0 - 99 999 999 kVarh or MVarh Accuracy : %2 class 2				
Total Harmonic Distortion (THD)	THD V%, THD I%				
Separate Harmonics	1-51 Voltage(V) and Current(I)				
Demand Period	1,2,5,10,15,20,30,60 min.				
Frequency	45-65 Hz				
SUPPLY					
Operating Voltage	85 - 300 VAC/DC				
Operating Frequency	50/60 Hz				
Power Consumption	<5 VA				
DIGITAL INPUT / OUTPUT					
Digital Input Pulse Width	-	20/500 ms			
Digital Input Operating Voltage	-	12...48 VAC/DC			
Switching Current	-	Max 50mA			
Digital Output Supply Voltage	-	5-30 VDC (open collector)			
Pulse Duration	-	100ms pulse period 80ms pulse width			
Pulse Width	-	20-500 ms (Adjustable)			
ANALOG OUTPUT					
Current Output	-	0-20mA, 4-20mA, 4-24mA			-
Voltage Output	-	0-5V, 0-10V, ±5V, ±10V			-
RELAY OUTPUT					
Relay Output	-	1 NO Contact, 250 AC/6A			-
TEMPERATURE INPUT					
Sensor Input Type	-	PTC or Thermocouple type			
Thermocouple Type	-	B,C,K,R,S,T			
MEMORY					
Internal Memory Size	-	4MB			
COMMUNICATION					
Communication Interface/Protocol	-	RS 485 / MODBUS RTU			
Transfer Speed	-	2400-115200			
AMBIENT CONDITIONS					
Operating Temperature	- 10 / +55°C				
Storage Temperature	- 20 / +70°C				
Overvoltage Category	III				
Pollution Degree	II				
Ambient Humidity	%95				
STANDARDS					
Standards	EN 61557-12, EN 61326-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4 EN 62053, EN 60068, EN 61010				
CONNECTIONS					
Mounting	Rail Mounting				
Connection Terminals	Screw Terminal				
Connection Types	3P4W, 3P3W, 3 Phase Aron, 3P4W Balanced, 3P3W Balanced				

Address: Dudullu OSB 1. Cad. No:23, 34776 Ümraniye-Istanbul / TURKEY

Tel: +90 216 313 01 10 - Fax: +90 216 314 16 15

E-mail: impex@entes.com.tr - Web: www.entes.com.tr

Coordinates: 40.995852 , 29.178398